


3/8" x 5.5"
ASC PULLING/LIFTING IRON
AMERICAN STEEL AND AMERICAN FABRICATED
ITEM # 375-550

for use only in properly steel reinforced concrete
 not for use in non reinforced concrete

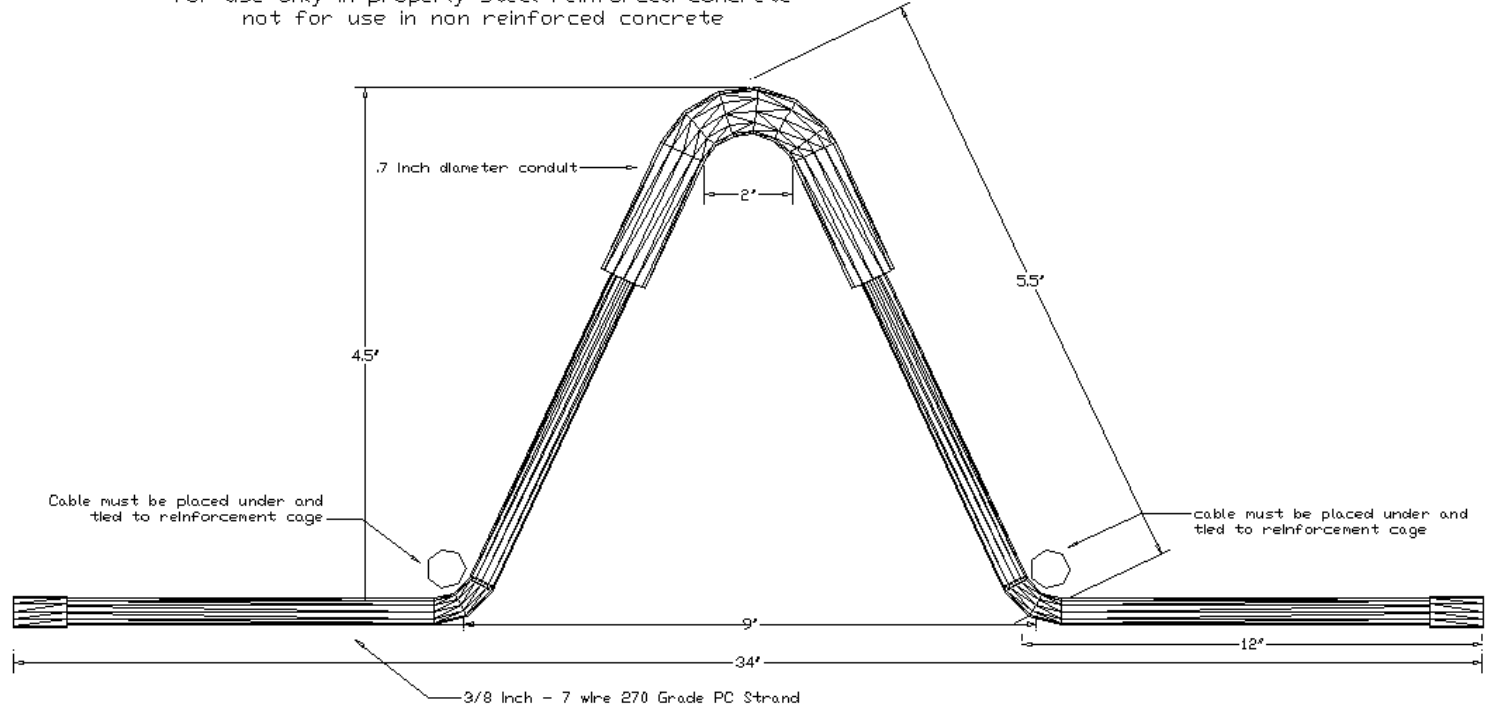

LOAD RATINGS WERE ESTABLISHED WHEN PULLING/LIFTING IRON WAS EMBEDDED
 3" IN 4000 PSI CONCRETE WITH STEEL REINFORCEMENT OF 1/2" GR. 60 A615 REBAR
 ON 12" X 12" SPACING THAT THE HAUNCHES OF THE PULLING IRON WERE SECURELY UNDER.

LOAD RATINGS COMPLY WITH OSHA 1926.704 (c) 4:1 SAFETY FACTOR



CONCRETE STRENGTH	TENSION STRAIGHT UP
4000 PSI	5,000 POUNDS

American Step Company, Inc.
 P. O. Box 137
 830 East Broadway
 Griffin, GA 30224-0137

800-988-STEP
 770-467-9844(OFFICE)
 770-467-8011 (FAX)
 www.americanstep.com